



Raccordi Mod. 6512

Con O-Ring montato

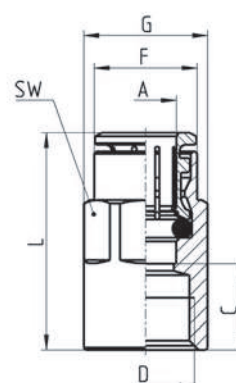

INGOMBRI										
Mod.	A	D	C	F	G	H	L	SW	SW1	Peso (g)
6512 4-M5	4	M5	6	7,8	8,8	4	20	8	2	4
6512 4-M6	4	M6	6,5	8,8	9,9	4,5	20,5	9	2,5	6
6512 4-1/8	4	G1/8	5	8,8	13,5	6	19	12	2,5	10
6512 4-1/4	4	G1/4	6,5	8,8	16,4	7	20,5	15	2,5	14
6512 5-M5	5	M5	6	8,8	9,9	4	21	9	2	5
6512 6-M5	6	M5	6	11,7	13,2	4	22	12	2	8
6512 6-1/8	6	G1/8	5	11,7	13,5	6	21	12	4	10
6512 6-1/4	6	G1/4	6	11,7	16,4	7	22	15	4	13
6512 8-1/8	8	G1/8	8,5	13,7	15,2	6	26	14	5	15
6512 8-1/4	8	G1/4	7	13,7	16,4	7	24,5	15	6	17
6512 8-3/8	8	G3/8	6,5	13,7	20,5	7	23	19	6	27
6512 10-1/4	10	G1/4	9,8	15,4	18,5	7	30	17	7	26
6512 10-3/8	10	G3/8	5,3	15,4	20,5	7	24,5	19	8	27
6512 12-1/4	12	G1/4	10,5	18,3	20,5	7	29,5	19	7	29
6512 12-3/8	12	G3/8	5,8	18,3	20,5	7	24	19	9	24

Raccordi Mod. 6463


INGOMBRI									
Mod.	A	D	C	F	G	L	SW	Peso (g)	
6463 4-M5	4	M5	6,5	7,8	8,8	20,5	9	8	
6463 4-1/8	4	G1/8	10	9	13	24	12	14	
6463 5-1/8	5	G1/8	10	9,8	13	25	12	14	
6463 6-1/8	6	G1/8	10	11,7	13	26	12	14	
6463 6-1/4	6	G1/4	11,5	11,9	16,5	27,5	15	23	
6463 8-1/8	8	G1/8	9,5	13,7	15,2	27	14	16	
6463 8-1/4	8	G1/4	11,5	13,7	16,5	29	15	23	
6463 10-1/4	10	G1/4	11,3	15,4	18,5	31,5	17	29	