



ART. 331/L

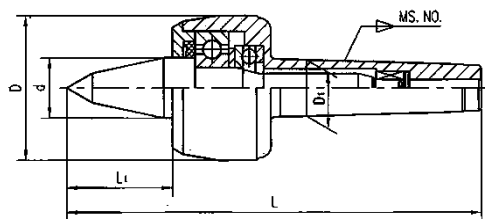

Misura	L mm	D mm	L1 mm	d mm	D1 mm	Carico max. (kg)	Velocità max. (rpm)	Precisione mm	€
CM-1	124	36	27	15	12.065	80	7000	0,01	75,00
CM-2	139	45	34	20	17.780	140	7000	0,005	80,00
CM-3	176,5	60	47	25	23.825	400	5000	0,005	90,00
CM-4	217	70	53	32	31.267	500	3800	0,005	120,00
CM-5	273	90	65	40	44.399	1200	3000	0,005	250,00
CM-6	354,5	105	78	50	63.348	2500	2600	0,01	390,00

CONTROPUNTA GIREVOLE STANDARD ALTA VELOCITÀ LIVE CENTER

ART. 331/S

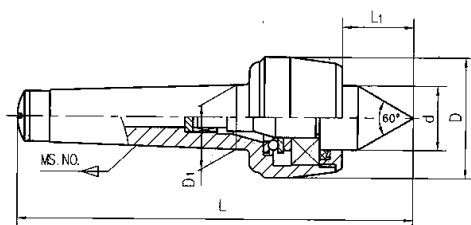

Misura	L mm	Larghezza mm	Capacità Carico (kg)	RPM	Precisione	€
CM-1	115	34	320	5000	0,005	55,00
CM-2	130,6	45	400	5000	0,006	59,00
CM-3	161,7	52	800	4500	0,006	80,00
CM-4	195,7	60	1250	3500	0,006	100,00
CM-5	245,5	80	1500	3000	0,006	170,00
CM-6	357,5	130	1800	2500	0,006	310,00