




## RIV 3130

Raccordo tre pezzi  
 maschio portagomma diritto  
 sede metallica

### Disegni tecnici e tavole

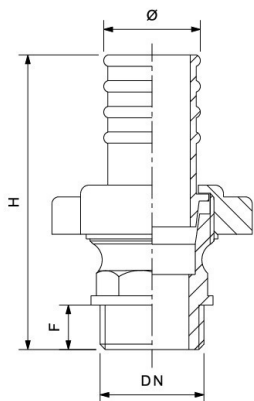


DN	Codice	H	F	PN	KG	P/box
1" x 25	033130000247	83	13	10	0,19	15
1" x 30	033130000250	94	13	10	0,31	10
1" x 32	033130000251	95	13	10	0,31	10
1"1/2 x 40	033130000332	110	16	10	0,49	6
1"1/4 x 30	033130000290	96	13	10	0,32	10
1"1/4 x 32	033130000291	96	13	10	0,32	10
1"1/4 x 35	033130000292	104	15	10	0,40	8
1"1/4 x 40	033130000295	111	15	10	0,47	6
1/2" x 15	033130000165	57	10	10	0,08	20
1/2" x 18	033130000167	65	10	10	0,10	15
1/2" x 20	033130000168	64	10	10	0,12	15
2" x 50	033130000371	126	16	10	0,78	6
2" x 60	033130000373	140	20	10	1,08	5
2"1/2 x 60	033130000417	134	18	10	1,25	5
3/4" x 20	033130000210	65	11	10	0,13	15
3/4" x 25	033130000213	77	10	10	0,17	15
3/8" x 15	033130000134	56	9	10	0,08	25

## Dati tecnici

Art. 3100

### Materiali

1 Corpo Ottone CW617N



Attacco	ISO 228/1
Limite	-10°C (in assenza di liquido) + 100°C
Note	La pressione max. di utilizzo (PN) si intende a temperatura ambiente di circa 23°C.