


Raccordi Mod. 6442 Micro

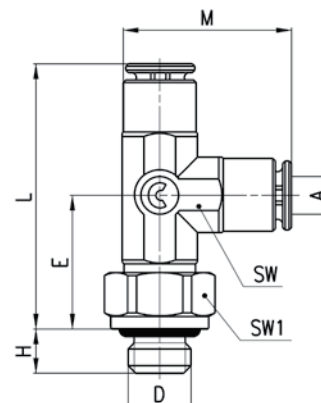


Mod.	A	D	E	H	L	M	SW	SW1	Peso (g)	
6442 3-M3	3	M3	10,7	2,5	21,4	13,7	6	6	5	★
6442 3-M5	3	M5	12,2	3,5	21,4	13,7	6	8	6	●

★ = con Mod. 2661 montato

● = con O-Ring montato

Raccordi Mod. 6442

Modello girevole con O-ring montato

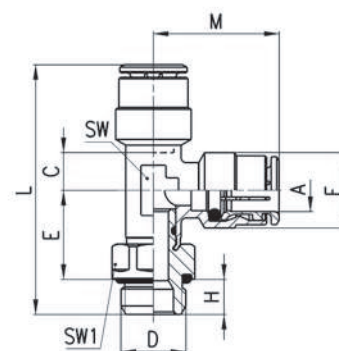

Mod.	A	C	D	E	F	H	L	M	SW	SW1	Peso (g)
6442 4-M5	4	3,5	M5	12,5	9	4	34	17,5	8	8	18
6442 4-1/8	4	3,5	G1/8	14,5	9	6	38	17,5	8	12	19
6442 5-M5	5	5,5	M5	12,5	10	4	36,5	20,5	9	8	19
6442 6-1/8	6	4	G1/8	15	12,7	6	41	20	9	12	26
6442 6-1/4	6	4	G1/4	16	12,7	7	43	20	9	15	36
6442 8-1/8	8	5	G1/8	16	14,2	6	44,5	22,5	11	12	31
6442 8-1/4	8	5	G1/4	17	14,2	7	46,5	22,5	11	15	42
6442 8-3/8	8	5	G3/8	17	14,2	7	46,5	22,5	11	19	50
6442 10-1/4	10	5,8	G1/4	19,5	16,5	7	52,5	26	13	15	46
6442 10-3/8	10	5,8	G3/8	19,5	16,5	7	52,5	26	13	19	66
6442 12-1/4	12	7,3	G1/4	20	16,5	7	53,5	26,5	15	17	73
6442 12-3/8	12	7,3	G3/8	20,5	19,5	7	54	26,5	15	19	64