
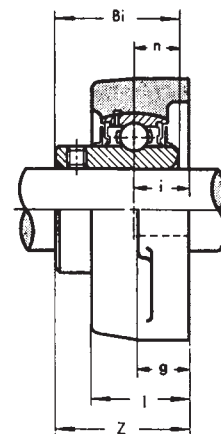
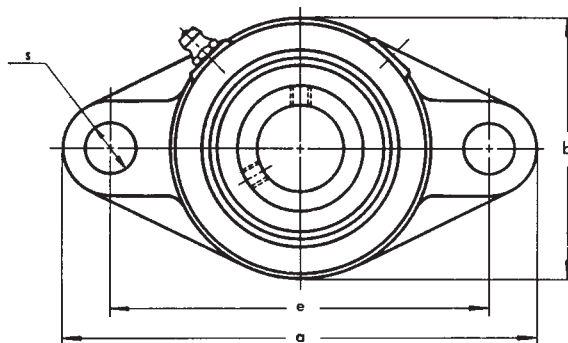


SUPPORTO A FLANGIA CON DUE FORI DI FISSAGGIO



Tipo **UCFL 200** (applicazioni di uso comune)

Tipo n.	Ø albero mm	Dimensioni (mm)										Bullone fissaggio mm	Cuscinetto n.	Supporto n.	Peso kg	Carico cuscinetto kg	
		a	e	i	g	l	s	b	Z	Bi	n					dinam.	statico
UCFL 201	12	113	90	15	12	25,5	12	60	33,3	31	12,7	M 10	UC 201	FL 204	0,5	1310	680
UCFL 202	15												UC 202		0,48	1310	680
UCFL 203	17												UC 203		0,47	1310	680
UCFL 204	20												UC 204		0,45	1310	680
UCFL 205	25	130	99	16	14	27	16	68	35,7	34	14,3	M 14	UC 205	FL 205	0,63	1430	800
UCFL 206	30	148	117	18	14	31	16	80	40,2	38,1	15,9	M 14	UC 206	FL 206	0,96	2000	1150
UCFL 207	35	161	130	19	16	34	16	90	44,4	42,9	17,5	M 14	UC 207	FL 207	1,23	2640	1570
UCFL 208	40	175	144	21	16	36	16	100	51,2	49,2	19	M 14	UC 208	FL 208	1,58	2990	1830
UCFL 209	45	188	148	22	18	38	19	108	52,2	49,2	19	M 16	UC 209	FL 209	1,91	3350	2090
UCFL 210	50	197	157	22	18	40	19	115	54,6	51,6	19	M 16	UC 210	FL 210	2,19	3600	2370
UCFL 211	55	224	184	25	20	43	19	130	58,4	55,6	22,2	M 16	UC 211	FL 211	3,15	4400	3000
UCFL 212	60	250	202	29	20	48	23	140	68,7	65,1	25,4	M 20	UC 212	FL 212	4,08	5350	3700
UCFL 213	65	258	210	30	24	50	23	155	69,7	65,1	25,4	M 20	UC 213	FL 213	5,06	5850	4100
UCFL 214	70	265	216	31	24	54	23	160	75,4	74,6	30,2	M 20	UC 214	FL 214	6,01	6350	4500
UCFL 215	75	275	225	34	24	56	23	165	78,5	77,8	33,3	M 20	UC 215	FL 215	6,48	6750	4900
UCFL 216	80	290	233	34	24	58	25	180	83,3	82,6	33,3	M 22	UC 216	FL 216	8,02	7400	5400
UCFL 217	85	305	248	36	26	63	25	190	87,6	85,7	34,1	M 22	UC 217	FL 217	9,48	8500	6300
UCFL 218	90	320	265	40	26	68	25	205	96,3	96	39,7	M 22	UC 218	FL 218	11,88	9750	7300

Tipo **UCFL X00** (applicazioni con carichi di media entità)

UCFL X05	25	141	117	18	13	30	12	83	40,2	38,1	15,9	M 10	UC X05	FL X05	1	2000	1150
UCFL X06	30	156	130	19	14	34	16	95	44,4	42,9	17,5	M 14	UC X06	FL X06	1,4	2640	1570
UCFL X07	35	171	144	21	14	38	16	105	51,2	49,2	19	M 14	UC X07	FL X07	1,9	2990	1830
UCFL X08	40	179	148	22	14	40	16	111	52,2	49,2	19	M 14	UC X08	FL X08	2	3350	2090
UCFL X09	45	189	157	23	14	40	16	116	55,6	51,6	19	M 14	UC X09	FL X09	2,4	3600	2370
UCFL X10	50	216	184	26	20	44	19	133	59,4	55,6	22,2	M 16	UC X10	FL X10	3,6	4400	3000

Tipo **UCFL 300** (applicazioni con carichi notevoli)

UCFL 305	25	150	113	16	13	29	19	80	39	38	15	M 16	UC 305	FL 305	1,09	2170	1120
UCFL 306	30	180	134	18	15	32	23	90	44	43	17	M 20	UC 306	FL 306	1,51	2730	1530
UCFL 307	35	185	141	20	16	36	23	100	49	48	19	M 20	UC 307	FL 307	1,84	3400	1960
UCFL 308	40	200	158	23	17	40	23	112	56	52	19	M 20	UC 308	FL 308	2,41	4150	2440
UCFL 309	45	230	177	25	18	44	25	125	60	57	22	M 22	UC 309	FL 309	3,37	5250	3000
UCFL 310	50	240	187	28	19	48	25	140	67	61	22	M 22	UC 310	FL 310	4,33	6300	3900
UCFL 311	55	250	198	30	20	52	25	150	71	66	25	M 22	UC 311	FL 311	5,09	7300	4600
UCFL 312	60	270	212	33	22	56	31	160	78	71	26	M 27	UC 312	FL 312	6,19	8300	5300
UCFL 313	65	295	240	33	25	58	31	175	78	75	30	M 27	UC 313	FL 313	7,43	9450	6100
UCFL 314	70	315	250	36	28	61	35	185	81	78	33	M 30	UC 314	FL 314	8,95	10600	6900
UCFL 315	75	320	260	39	30	66	35	195	89	82	32	M 30	UC 315	FL 315	10,02	11600	7800
UCFL 316	80	355	285	38	32	68	38	210	90	86	34	M 33	UC 316	FL 316	12,62	12500	8800
UCFL 317	85	370	300	44	32	74	38	220	100	96	40	M 33	UC 317	FL 317	14,52	13500	9800
UCFL 318	90	385	315	44	36	76	38	235	100	96	40	M 33	UC 318	FL 318	17,06	14600	10900
UCFL 319	95	405	330	59	40	94	41	250	121	103	41	M 36	UC 319	FL 319	21,76	15600	12100
UCFL 320	100	440	360	59	40	94	44	270	125	108	42	M 39	UC 320	FL 320	26,48	17700	14300
UCFL 321	105	440	360	59	40	94	44	270	127	112	44	M 39	UC 321	FL 321	28,19	18700	15600
UCFL 322	110	470	390	60	42	96	44	300	131	117	46	M 39	UC 322	FL 322	33,11	20900	18200
UCFL 324	120	520	430	65	48	110	47	330	140	126	51	M 42	UC 324	FL 324	45,67	21100	18900
UCFL 326	130	550	460	65	50	115	47	360	146	135	54	M 42	UC 326	FL 326	57,49	23400	21900
UCFL 328	140	600	500	75	60	125	51	400	161	145	59	M 45	UC 328	FL 328	79,7	26000	25100

Tipo **BFL 200** (una sola tenuta senza ingrassatore con cuscinetto lubrificato a vita)

BFL 204	20	113	90	15	12	25,5	12	60	32,7	24,7	7	M 10	B 4	FL 204	0,41	1310	680
BFL 205	25	130	99	16	14	27	16	68	35,5	27	7,5	M 14	B 5	FL 205	0,6	1430	800
BFL 206	30	148	117	18	14	31	16	80	40,3	30,3	8	M 14	B 6	FL 206	0,88	2000	1150
BFL 207	35	161	130	19	16	34	16	90	43,4	32,9	8,5	M 14	B 7	FL 207	1,2	2640	1570