


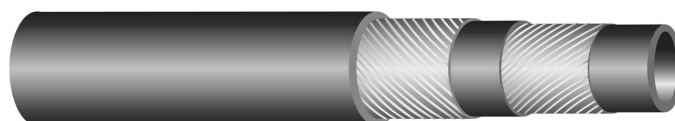

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1448188	5	12/61	12	0,47	10	150	30	450	0,12	0,08	40	1,6	100	328
1448196	6	17/72	13	0,51	10	150	30	450	0,14	0,09	50	2,0	100	328
1448200	8	5/16	15	0,59	10	150	30	450	0,16	0,11	65	2,6	100	328
1448218	10	25/64	17	0,67	10	150	30	450	0,19	0,13	80	3,2	100	328
1448226	13	1/2	20	0,79	10	150	30	450	0,23	0,15	105	4,1	60	200
1448234	15	19/32	23	0,91	10	150	30	450	0,30	0,20	120	4,7	60	200
1448242	19	3/4	27	1,06	10	150	30	450	0,37	0,25	150	5,9	60	200
1448250	25	1	35	1,38	10	150	30	450	0,60	0,40	200	7,9	40	131


**IT**

**Applicazione:** adatto per mandata di carburanti, o per lubrificazione ed ingrassaggio nei più vari servizi.

**Temperatura:** da -20 °C a +60 °C.

**Costruzione**

**Sottostrato:** nero, liscio in gomma NBR, conduttivo, resistente ad oli e carburanti con contenuto di aromatici fino al 50%.

**Rinforzo:** inserti tessili ad alta tenacità.

**Copertura:** nera, liscia in gomma PVC/NBR, resistente ai carburanti, agli oli e agli agenti atmosferici.

**Marcatura:** IVG RUBBER HOSE CARBUR 10 BAR W.P. - SIZE - 50 % Aromatico - BATCH NUMBER.

**EN**

**Application:** suitable for delivery of fuels, or for lubrication and greasing in different services.

**Temperature:** from -20 °C (-4 °F) to +60 °C (+140 °F).

**Construction**

**Tube:** black, seamless NBR conductive rubber, suitable to convey fuel and oils with aromatic content up to 50%.

**Reinforcement:** high strength synthetic fabrics.

**Cover:** black, seamless PVC/NBR rubber, resistant to fuel, oil, and weathering.

**Branding:** IVG RUBBER HOSE CARBUR 10 BAR W.P. - SIZE - 50 % Aromatico - BATCH NUMBER.

