



Tubi pneumatici

Pneumatic hoses

TUBO IN POLIURETANO RETINATO (PU) dalair+

Caratteristiche

Tubo flessibile estremamente leggero con elevata resistenza all'abrasione

Costruzione

Tubo poliuretano con rinforzo in filato di poliestere

Applicazioni

Utensileria pneumatica, aria compressa, verniciatura a spruzzo.

Colore: azzurro

Temperatura d'esercizio:

da -25°C a +60°C

Imballo: rotolo 100 m

REINFORCE POLYURETHANE HOSE (PU) dalair +

Features

Flexible and lightweight hose with very good abrasion resistance

Construction

Polyurethane hose with polyester yarn reinforcement

Applications:


Pneumatic tools, compressed air, paintspray equipments

Color: light blue

Working temperature:

from -25° C to +60° C

Packaging: roll 100 m

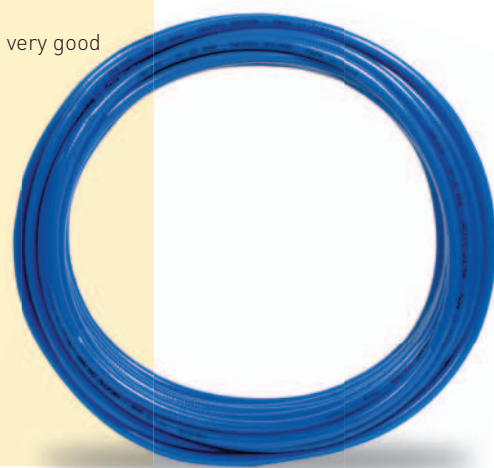

CODICE CODE	DIAMETRO TUBO mm HOSE DIAMETER mm		SPESSORE mm THICKNESS mm	PRESSIONE IN bar a 23° C PRESSURE bar at 23°C		PESO g/m WEIGHT g/m
	INTERNO INTERNAL	ESTERNO EXTERNAL		ESERCIZIO WORKING	SCOPPIO BURST	
TFP12706	6	10	2,0	20	60	65
TFP12708	8	12	2,0	20	60	85
TFP12710	10	15	2,5	20	60	130
TFP12713	13	19	3,0	20	60	195