


TIPO 05A

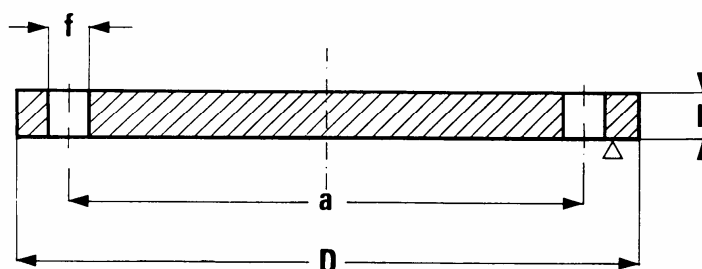

DN	a	D	b	f	VITI	N. FORI	Kg
10	60	90	16	14	M12	4	0,63
15	65	95	16	14	M12	4	0,71
20	75	105	18	14	M12	4	1,01
25	85	115	18	14	M12	4	1,22
32	100	140	18	18	M16	4	1,80
40	110	150	18	18	M16	4	2,09
50	125	165	18	18	M16	4	2,87
65	145	185	18	18	M16	8	3,65
80	160	200	20	18	M16	• 8	4,61
100	180	220	20	18	M16	8	5,65
125	210	250	22	18	M16	8	8,12
150	240	285	22	22	M20	8	10,50
200	295	340	24	22	M20	8	16,50
250	350	395	24	22	M20	12	24,10
300	400	445	26	22	M20	12	30,80
350	460	505	26	22	M20	16	39,60
400	515	565	26	26	M24	16	49,60
450	565	615	28	26	M24	20	63,00
500	620	670	28	26	M24	20	73,30
600	725	780	34	30	M27	20	124,0
700	840	895	38	30	M27	24	182,5
800	950	1015	42	33	M30	24	260,0
900	1050	1115	46	33	M30	28	344,0
1000	1160	1230	52	36	M33	28	473,5
1200	1380	1455	60	39	M36	32	765,0

•: A richiesta possono essere fornite con 4 fori.