


## Catena a rulli serie ASA



Serie  
ASA B 29.1  
DIN 8188

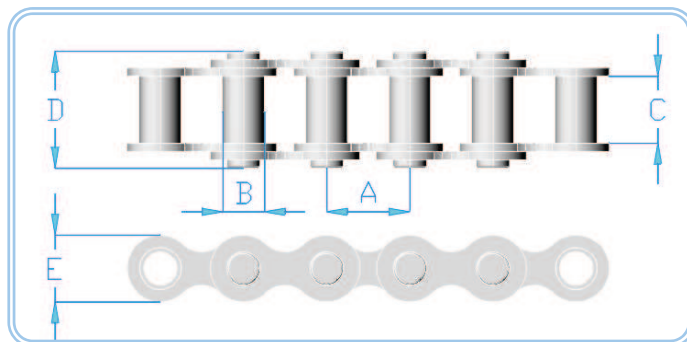

Fornibili giunzioni per catene e false maglie

### Catena a rulli serie Americana ASA tipo semplice

Rif.	Passo in Pollici	A mm	B mm	C mm	D mm	E mm	Carico Rottura		Peso KG/Mt
							KG	N	
ASA35	3/8X3/16	9,525	5,08	4,77	11,80	8,80	1000	9.810	0,31
ASA40	1/2X5/16	12,70	7,95	7,95	16,40	11,20	1750	17.168	0,61
ASA50	5/8X3/8	15,875	10,16	9,53	20,30	15,10	2800	27.468	1,01
ASA60	3/4X1/2	19,05	11,91	12,70	25,50	18,00	3800	37.278	1,58
ASA80	1"X5/8	25,40	15,88	15,88	33,50	24,00	6600	64.746	2,36
ASA100	1"1/4X3/4	31,75	19,05	19,05	40,40	29,60	10800	105.948	3,80
ASA120	1"1/2X1"	38,10	22,23	25,40	50,50	36,00	15400	151.074	5,40
ASA140	1"3/4X1"	44,45	25,40	25,40	54,50	42,00	20800	204.048	7,30
ASA160	2"X1"3/4	50,80	25,58	31,75	64,50	48,00	26200	257.022	9,90
ASA200	2"1/2X1"1/2	63,50	39,68	38,10	80,30	60,33	43000	421.830	16,50

### Catena a rulli serie Americana ASA rinforzata tipo semplice

Rif.	Misure in Pollici	A mm	B mm	C mm	D mm	E mm	Carico Rottura		Peso KG/Mt
							KG	N	
ASA60	3/4X1/2	19,05	11,91	12,70	29,50	18,08	3800	37.278	1,58
ASA80	1"X5/8	25,40	15,88	15,88	36,50	24,13	6600	64.746	2,36
ASA100	1"1/4X3/4	31,75	19,05	19,05	44,00	30,18	10800	105.948	3,80
ASA120	1"1/2X1"	38,10	22,23	25,40	55,10	36,20	15400	151.074	5,40